



(11) **EP 2 172 330 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.04.2010 Bulletin 2010/14

(51) Int Cl.:
B32B 5/18 (2006.01) *B32B 18/00* (2006.01)
E04F 13/14 (2006.01) *E04F 15/02* (2006.01)

(21) Application number: 09011969.4

(22) Date of filing: 20.09.2009

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**
Designated Extension States:
AL BA RS

(72) Inventor: **Hilbrink, Jan Willem**
3991 MZ Houten (NL)

(74) Representative: **Altenburg, Bernardus Stephanus
Franciscus**
ALTENBURG PATENT
Ravelijnstraat 125
4102 AJ Culemborg (NL)

(30) Priority: 22.09.2008 NL 1035966

(71) Applicant: **Hilbrink, Jan Willem**
3991 MZ Houten (NL)

(54) **An insulating tile and a method of providing a surface with tiles**

(57) The present invention relates to an insulating tile, having a first side with a first main surface and an opposite second side with a second main surface, said first side being comprised of a stone or ceramic material comprising layer, said stone or ceramic material comprising layer being connected to a thermally insulating hard foam material. The tile is **characterized in that** said

thermally insulating hard foam material is connected to a vapour proof material which forms said second side.

According to a preferred embodiment the tile is sloped due to a sloped insulating layer. The tile may be laid with jointing elements that are inserted in a sidewall of the tile. The tile can be used for paving a base layer such as a roof terrace or a wall of a building.

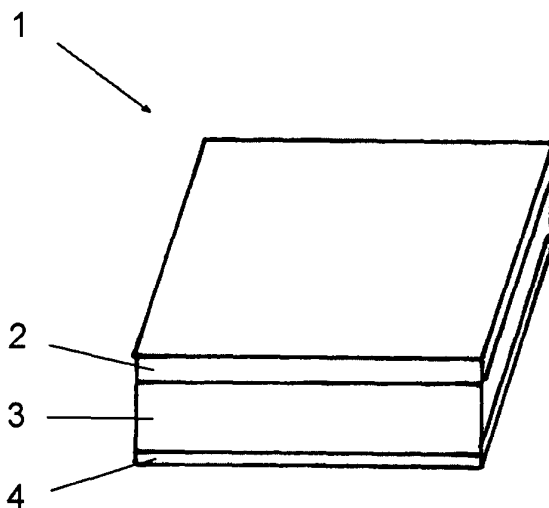


Fig. 1

EP 2 172 330 A1

Description

[0001] The present invention relates to an insulating tile as mentioned in the preamble of claim 1. The invention also relates to a jointing element, to a set comprising same and to methods for paving a floor and finishing a wall.

[0002] The tile as mentioned above is known from DE 29 822 831. Said known tile was developed for indoor applications. Since it comprises a layer of wood or polystyrene, outdoor application is explicitly excluded.

[0003] The present invention aims at providing a tile with an enhanced applicability.

[0004] The present invention especially aims at providing a tile, suitable for both outdoor use and indoor use where wet and/or cold conditions can be expected.

[0005] The present invention further aims at providing a tile that has a high strength and can also be used on a loose or non-level surface, e.g. sand.

[0006] The present invention therefore provides a tile with the features as mentioned in claim 1. It has been found that the use of a vapour proof layer at the second side of the second layer prevents water vapour from reaching the boundary layer of the stone or ceramic material comprising layer and the layer of hard foam material to the extent that under freezing conditions the connection between the first layer and the second layer is not broken, as it would otherwise have occurred. Also, the thermally insulating properties of the tile are improved because less water is present in the second layer. Surprisingly, the sidewalls of the tile according to the invention need not be covered with a vapour proof material to obtain these advantageous effects. This allows a tile according to the invention to be cut and/or sawed at the required size, both for manufacturing purposes and when laying tiles. A tile according to the invention may be used on a roof terrace. Rainwater will mostly be drained over the surface of the tiles. Any rainwater flowing away through slits between adjacent tiles may. Excess water accumulating under the tiles will be protected from freezing because it is on top the roof. Any water in the slits between the tiles is still able to evaporate with relative ease. The tiles according to the present invention may be laid without glue. In general, the first main side of the first layer and the second main side of the second layer are mainly parallel.

[0007] In the present application, the term "vapour proof material" or layer means a material that has a water vapour blocking capacity with a μ -D value of at least 75 m, preferably at least 200 m and more preferably at least 500 m (as can be determined in accordance with the standard EN12086). A very suitable vapour proof layer is for example a plastic film provided with a metal coating, or a layer of cured epoxy resin. Preferably the vapour proof layer is an aluminium layer. The vapour proof layer will in general cover at least 80% of the surface area of the second side of the second layer, preferably at least 90% and more preferably at least 95%, about 100% being

most preferred. Any surface area not covered is preferably surface area near the edges of the tile. Preferably any surface area not covered is for at least 50% within a distance from the circumference of the tile equal to the thickness of the second layer. A tile according to the invention will in general have a rectangular shape, which includes a square shape, although other esthetical forms are possible. The first layer will have a μ value larger than the μ value of the second layer.

[0008] When laying tiles on a sand base layer, some settling of the sand base layer over time will occur. As a consequence, the tiles are not evenly supported anymore and tilting may occur when the tiles are subjected to loads. It is particularly then is advantageous if the tile comprises a layer of reinforcing material. Preferably, said layer of reinforcing material is at the opposite side of the first main side of the second layer, such as connected to the second main side of the second layer.

[0009] For the same reason, to reduce noise, or to compensate for the effect of an uneven (hard) surface onto which the tiles have been laid, it is advantageous if the tile comprises a layer of cushioning material. According to a preferred embodiment to compensate for an uneven base surface onto which tiles are laid, said layer of cushioning material is at the opposite side of the first main side of the second layer.

[0010] The material the first layer comprises a stone or ceramic material comprising layer, which may for example be chosen from flag, granite, artificial stone, resin based artificial stone, concrete, or cement based material. Artificial stone is a material comprising stones, grid, pieces of granite, flint, flag and the like, and which is resin or cement bonded. It is preferred that the first layer has a closed surface so as to make it impermeable for liquids. This is not an absolute requirement, as any water reaching the boundary between the first layer and the second layer may dissipate in the reverse direction. The first layer is typically a layer of ceramic or natural stone.

[0011] A convenient and comfortable floor may be obtained with a tile comprising a heating element, chosen from heating hoses and heating wires, preferably provided in said thermal insulating material or between said thermal insulating material and said ceramic layer. Especially in icy conditions, a heating element will ease removal of snow and ice from the tiles. Turning the heating element on for a time sufficient to melt an ice or snow layer on top of the tile, i.e. to increase the temperature to a value of just above 0 degree C, will enable one to remove the said layer of ice or snow. It may make a roof terrace a nice place to be for a longer period of time during the year.

[0012] A preferred tile is obtained when, as a hard foam material, said thermally insulating material is chosen from extruded polystyrene, polyurethane or another insulating hard foam material, like foamed concrete or cellular glass. These materials can be produced such that they provide thermal insulation as well as long-term durability.

[0013] According to a preferred embodiment, the tile

is at the second main side of the vapour proof layer provided with grooves ending at the circumference of the tile.

[0014] This allows water below a tile to be drained away or evaporate, reducing the chance of entering the second layer.

[0015] For providing a stable floor of tiles, it is preferred that a sidewall of said tile comprises a profile for cooperative coupling with a sidewall of a neighbouring tile. Then, neighbouring tiles can be interconnected which improves the stability of the tile floor. Preferably, said profile is comprised of a groove in a sidewall of a first tile for receiving a protruding element in a sidewall of a neighbouring tile. According to a further preference, said protruding element may be comprised of a separate jointing element such as a strip, e.g. an aluminium strip, provided for cooperation with a groove of a neighbouring tile. For then, all tiles can be produced identically, with grooves in at least two but preferably all sidewalls, and wherein such separate jointing element are introduced in both grooves for interconnecting neighbouring tiles.

[0016] If the tile is to be used for outside use, it may be preferred to provide some slope in the tile, for easing drain of rainwater and the like. Such can most easily be obtained with a rectangular tile having two opposite sidewalls, comprising a sloped layer of insulating material such that said layer of insulating material has a first thickness at a first sidewall and a second thickness, different from said first thickness at said opposite sidewall. As a matter of fact, it is especially preferred that neighbouring tiles have a same height of adjacent sidewalls. For then the tiles can be laid on a level sand floor or other base layer.

[0017] The strip or similar jointing element may have a length that is much less than the length of a sidewall of a tile, so as to provide for open joints between tiles. However, it may also have a length that is substantially longer than the length of a sidewall of a tile, for example at least two tiles, at least three tiles or even more. Then, it will enable a straight laying of tiles.

[0018] As a matter of fact, it is especially preferred if the strip is provided with stiffening rib perpendicular to the strip and extending in a longitudinal direction of said strip. This provides for an increased rigidity in a direction perpendicular to the main surface of the tile.

[0019] The invention also relates to a method of providing a surface with tiles, comprising positioning a first and a second tile adjacent to each other, with an element protruding from the first tile into a profile in the sidewall of the second tile.

[0020] This restricts the relative movement of the adjacent tiles in at least one direction. The surface is for example the surface of soil, a roof terrace, or an outwardly facing side of a wall of a building.

[0021] According to a preferred embodiment the element is a strip, and both the first and the second tile have a profile capable of receiving said strip.

[0022] More preferably, the strip is provided with stiffening rib perpendicular to the strip and extending in a

longitudinal direction of said strip.

[0023] This is all explained above.

[0024] The present invention will now be illustrated with reference to the schematic drawing where

5

fig. 1 shows a perspective view of a tile according to a first embodiment of the invention,

fig. 2 shows an enlarged partial view of a tile according to a second embodiment of the invention,

10

fig. 3 shows a top view of the tile shown in fig. 2, and

fig. 4 shows a side view of a tile according to a fourth embodiment of the invention.

15

[0025] The figures are only intended to provide a schematic view of a tile according to the invention. The figures are not drawn to scale. The same parts are indicated with the same reference numerals in the figures.

20

[0026] A general view of a tile 1 according to the invention is shown in fig. 1. The tile 1 is comprised of a top layer 2, which can be comprised of a stone or ceramic material comprising layer. This top layer 2 is connected to a layer 3 of hard foam. Suitable hard foam materials are for example extruded polystyrene, polyurethane, foamed concrete and cellular glass. The layer 4 at the bottom side of the tile 1 as shown in fig. 1, to wit at the second main side of the layer 3 facing away from the top layer 2, comprises a vapour proof material, that is a water vapour blocking material.

25

[0027] According to the invention, the term vapour proof material means a material having a higher water vapour blocking capacity than the hard foam material of layer 3. In particular, the material of layer 4 may have a water repellent characteristic, due to a hydrophobic character. A preferred material is aluminium foil, which may be glued to the second layer 3.

30

[0028] Fig. 2 shows a preferred embodiment of the tile 1 according to the invention. The tile 1 comprises a first side 5 and a second, oppositely positioned side 6. The first side provides a first main surface 7, whereas the second side provides a second main surface (not visible in the figure). The layer 2 at the first side 5 is comprised of a stone like material. It is connected to a reinforcement layer 8. A suitable material for reinforcement layer 8 is a glass fibre netting. At the surface of the reinforcement layer 8 facing away from the top layer 2, a layer 3 of hard foam material is connected.

35

[0029] This layer 3 comprises a groove 9 along its sidewall. The depth of the groove 9 can be varied, depending on a jointing element, that will be described hereafter, to be inserted therein.

40

[0030] The layer 3 is, at its side facing away from the top layer, connected to another reinforcement layer 10. Then, the reinforcement layer 10 is connected to a cushioning layer 11, that in its turn is connected to a layer 12 of water vapour blocking material. An alternative embodiment, not shown, provides for interchanging layers 11 and 12, such that cushioning layer 11 is at the second side 6 of the tile 1.

45

[0031] The tile 1 as shown in Fig. 2 comprises many layers which are not all necessary in practice. In general, one reinforcement layer 8; 10 is sufficient to provide a sufficient strength to the tile 1.

[0032] According to a further preferred embodiment, not shown in this figure, the cushioning layer provides for the water vapour blocking capacity. Then, only one layer 11, 12 is required.

[0033] Fig. 3 shows a schematic top view of the tile 1 in the direction of the arrow A-A. The depth of the groove 9 in the layer 3 of hard foam material is schematically shown.

[0034] Fig. 4 shows a tile 1, comprising a top layer 2, a layer of insulating material 3 and a layer of vapour proof material 4, according to the invention, attached to a wall 13. An H-profile is used as a jointing element 14. One end 16 of a leg 15 of said H-profile is inserted into a groove 9 of said tile 1. Another end 17 of said same leg 15 is inserted into a neighbouring tile 1'. Another leg 18 of said jointing element 14 is connected to the wall 13, through an intermediate lath 19. The interconnecting bridge 20 provides for a distance between the tile 1, 1' and the wall 13 or lath 19.

[0035] The jointing element as used in the embodiment of fig. 4, may be a continuous element, stretching over the complete sidewall of the tile, both in horizontal and vertical directions. That way, a thorough protection against rainwater entering the space between the tile 1 and the wall 13 is obtained. The jointing element may also have a length of at least two tiles, for example three tiles, or even more. A similar embodiment may be used when paving a floor, but then it generally is advisable to use jointing elements that leave open some parts of the joints between tiles, so as to enable rainwater to flow away and to enable water accumulating under the tiles and in between joints, to evaporate.

[0036] When laying tiles on a floor, not shown, a jointing element in the form of an I or T profile may be used. Both ends of an I profile may respectively be inserted in grooves of neighbouring tiles, providing a stable floor of tiles 1.

[0037] When laying tiles 1 on a base layer of sand, a T profile may be used. A T-profile (not shown) comprises a first leg with a first end and a second end, and a second leg connected to said first leg at an intermediate position of said first leg. A free end of said second leg extends generally perpendicularly from said first leg. A first end of said first leg is inserted into a groove of a first tile and a second end is inserted into a groove of a second, neighbouring tile. A free end of said second leg can be inserted into the sand. This provides for a stable floor of tiles. The thickness of the second leg of the T or H profile determines the width of the joint between the tiles.

[0038] A man skilled in the art will be able to choose suitable types of glue or cement for connecting the layers of material to each other. Also further amendments can be made to the invention as described herein. For example, the sidewall of a tile can be provided with a double

groove, which requires a jointing element with a double set of first legs, the ends thereof to be inserted into said grooves.

Claims

1. An insulating tile (1) comprising a stack of layers, said stack comprising

- a first layer (2) having a first main side and an opposite second main side and comprising a material chosen from the group consisting of stone and ceramic

- a second layer (3) having a first main side and an opposite second main side and comprising a thermally insulating hard foam material, the first main side of the second layer (3) being connected to the second main side of said first layer (2),

characterized in that the second layer (3) is provided with a vapour proof layer (4), the vapour proof layer (4) having a first main side and an opposite second main side, the first main side of the vapour proof layer (4) being connected to the second main side of the second layer (3).

2. The insulating tile according to claim 1, comprising a layer of reinforcing material (8).

3. The insulating tile according to claim 2, wherein said layer of reinforcing material (8) is at the opposite side of the first main side of the second layer (3).

4. The insulating tile according to any of the preceding claims, comprising a layer of cushioning material.

5. The insulating tile according to claim 5, wherein said layer of cushioning material is at the opposite side of the first main side of the second layer (3).

6. The insulating tile according to any of the preceding claims, wherein the stone or ceramic material comprising layer comprises at least one of flag, granite, artificial stone, resin based artificial stone, concrete, or cement based material.

7. The insulating tile according to any of the preceding claims, wherein said tile comprises a heating element, chosen from heating hoses and heating wires, preferably provided in said thermal insulating material or between said thermal insulating material and said ceramic layer.

8. The insulating tile according to any of the preceding claims, wherein a sidewall of said tile comprises a profile for cooperative coupling with a sidewall of a

neighbouring tile.

9. The insulating tile according to any of the preceding claims, wherein said thermally insulating material is chosen from at least one of extruded polystyrene, polyurethane, foamed concrete and cellular glass. 5
10. The insulating tile according to any of the preceding claims, wherein the tile is at the second main side of the vapour proof layer (4) provided with grooves ending at the circumference of the tile (1). 10
11. The insulating tile according to any of claims 1-9, wherein said tile is rectangular having two opposite sidewalls, comprising a sloped layer of insulating material such that said layer of insulating material has a first thickness at a first sidewall and a second thickness, different from said first thickness at said opposite sidewall. 15
20
12. A method of providing a surface with tiles, comprising positioning a first and a second tile adjacent to each other, with an element protruding from the first tile into a profile in the sidewall of the second tile. 25
13. The method according to claim 12, wherein the element is a strip, and both the first and the second tile have a profile capable of receiving said strip.
14. The method according to claim 13, wherein the strip is provided with stiffening rib perpendicular to the strip and extending in a longitudinal direction of said strip. 30

35

40

45

50

55

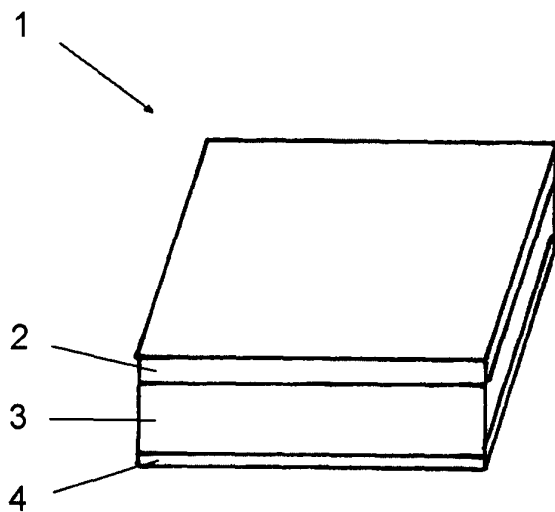


Fig. 1

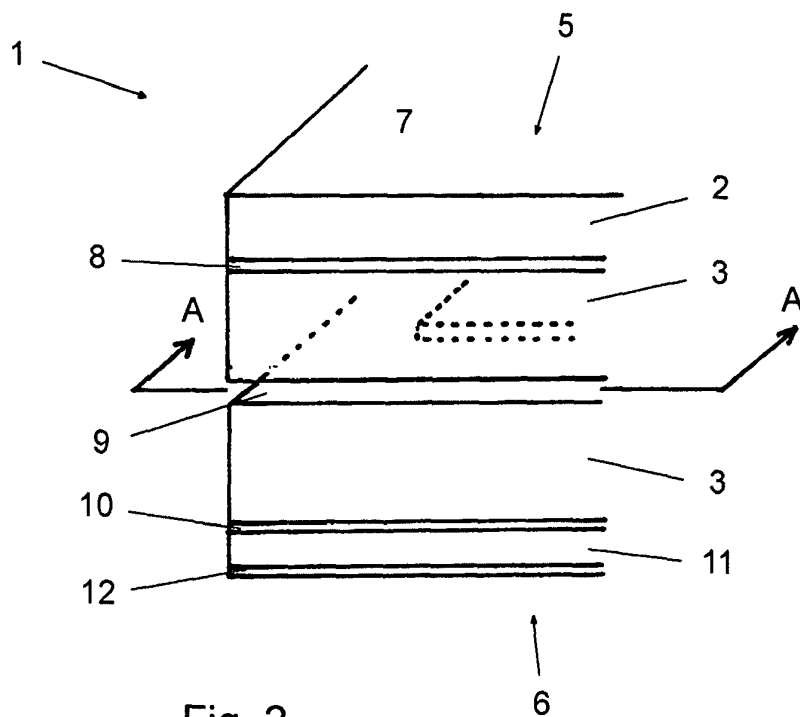


Fig. 2

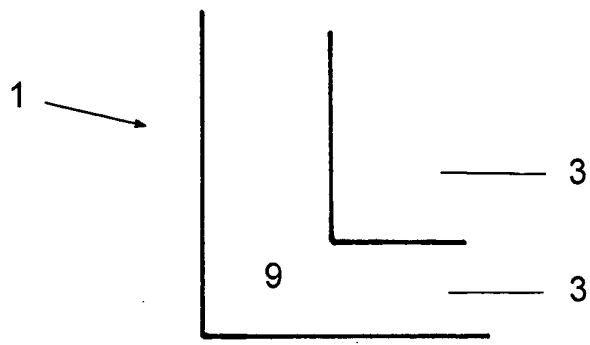


Fig. 3

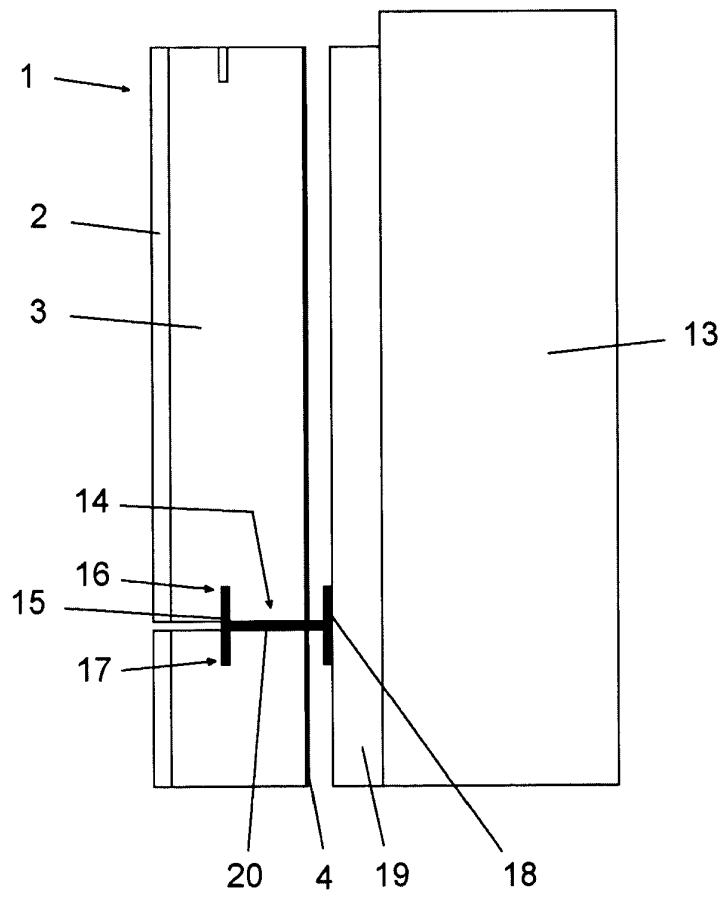


Fig. 4



EUROPEAN SEARCH REPORT

Application Number
EP 09 01 1969

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
D,Y	DE 298 22 831 U1 (CASA DA VINCI BODENSYSTEME GMB [DE]) 18 March 1999 (1999-03-18) * claim 1 *	1-11	INV. B32B5/18 B32B18/00 E04F13/14 E04F15/02
Y	----- DATABASE WPI Week 199921 Thomson Scientific, London, GB; AN 1999-247322 XP002556213 -& JP 11 036561 A (SUMIKEN SANGYO KK) 9 February 1999 (1999-02-09) * abstract *	1-11	
Y	----- US 2005/089678 A1 (MEAD STEVEN R [US]) 28 April 2005 (2005-04-28) * paragraphs [0002], [0004], [0017], [0022], [0023] *	1-11	
X	----- DE 10 2004 015809 A1 (LAY HELMUT [DE]) 27 October 2005 (2005-10-27) * claim 1 *	12-14	
X	----- CA 2 507 197 A1 (LEMIEUX ALAIN [CA]) 13 November 2006 (2006-11-13) * page 3, line 7 - page 4, line 12 * * page 7, lines 7-10 *	12-14	
X	----- FR 2 637 932 A (PLACOPLATRE SA [FR]) 20 April 1990 (1990-04-20) * claims 1,5 *	12-14	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			B32B E04F
3	Place of search Munich	Date of completion of the search 29 January 2010	Examiner Schambeck, Werner
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04001)



Application Number

EP 09 01 1969

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing claims for which payment was due.

- Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due and for those claims for which claims fees have been paid, namely claim(s):
- No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:
- The present supplementary European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims (Rule 164 (1) EPC).



**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 09 01 1969

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-11 directed to

an insulating tile comprising a stone or ceramic layer, a foam layer and a vapour proof layer

2. claims: 12-14 directed to

a method of providing a surface with tiles in such a manner that an element protrudes from a first tile into a profile in the sidewall of a second tile

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 01 1969

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-01-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 29822831 U1	18-03-1999	NONE	
JP 11036561 A	09-02-1999	JP 3551287 B2	04-08-2004
US 2005089678 A1	28-04-2005	NONE	
DE 102004015809 A1	27-10-2005	NONE	
CA 2507197 A1	13-11-2006	NONE	
FR 2637932 A	20-04-1990	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 29822831 [0002]